


Specifications	
Pressure Angle	20°
Material	C45
Heat Treatment	-
Tooth Surface Treatment	-
Tooth Surface Finish	Milled
Precision Grade	Commerical Class

Gear #	Module	Number of Teeth	PD	OD	d	F	I
SK0.4-25	0.4	25	10	10.8	6	80	19
SK0.4-30	0.4	30	12	12.8	6	80	19
SK0.4-32	0.4	32	12.8	13.6	6	80	19
SK0.4-35	0.4	35	14	14.8	6	80	19
SK0.4-36	0.4	36	14.4	15.2	6	80	19
SK0.4-45	0.4	45	18	18.8	6	80	19
SK0.4-48	0.4	48	19.2	20	6	80	19
SK0.4-50	0.4	50	20	20.8	6	80	19
SK0.4-60	0.4	60	24	24.8	12	80	19
SK0.4-64	0.4	64	25.6	26.4	12	150	19
SK0.4-65	0.4	65	26	26.8	12	150	19
SK0.4-70	0.4	70	28	28.8	12	150	19
SK0.4-72	0.4	72	28.8	29.6	12	150	19
SK0.4-75	0.4	75	30	30.8	12	150	19
SK0.4-80	0.4	80	32	32.8	12	150	19
SK0.4-85	0.4	85	34	34.8	12	150	19
SK0.4-90	0.4	90	36	36.8	12	150	19
SK0.4-95	0.4	95	38	38.8	12	200	19
SK0.4-96	0.4	96	38.4	39.2	12	200	19
SK0.4-100	0.4	100	40	40.8	12	200	19
SK0.4-108	0.4	108	43.2	44	12	200	19
SK0.4-120	0.4	120	48	48.8	12	200	19
SK0.5-16	0.5	16	8	9	6	80	19
SK0.5-18	0.5	18	9	10	6	80	19
SK0.5-24	0.5	24	12	13	6	80	19
SK0.5-28	0.5	28	14	15	6	80	19
SK0.5-30	0.5	30	15	16	6	80	19
SK0.5-32	0.5	32	16	17	6	80	19
SK0.5-36	0.5	36	18	19	6	80	19
SK0.5-40	0.5	40	20	21	6	80	19
SK0.5-48	0.5	48	24	25	12	80	19
SK0.5-50	0.5	50	25	26	12	150	19
SK0.5-55	0.5	55	27.5	28.5	12	150	19
SK0.5-56	0.5	56	28	29	12	150	19
SK0.5-60	0.5	60	30	31	12	150	19
SK0.5-65	0.5	65	32.5	33.5	12	150	19
SK0.5-70	0.5	70	35	36	12	150	19
SK0.5-72	0.5	72	36	37	12	150	19
SK0.5-75	0.5	75	37.5	38.5	12	200	19
SK0.5-80	0.5	80	40	41	12	200	19

Note: Dimensions (in millimeters unless otherwise indicated) and other engineering data are subject to change. Certified specifications are available on request.

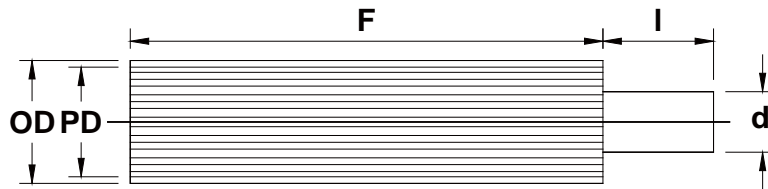

Specifications	
Pressure Angle	20°
Material	C45
Heat Treatment	-
Tooth Surface Treatment	-
Tooth Surface Finish	Milled
Precision Grade	Commerical Class

Gear #	Module	Number of Teeth	PD	OD	d	F	I
SK0.5-90	0.5	90	45	46	12	200	19
SK0.5-96	0.5	96	48	49	12	200	19
SK0.5-100	0.5	100	50	51	12	200	19
SK0.5-110	0.5	110	55	56	16	200	19
SK0.5-120	0.5	120	60	61	16	200	19
SK0.8-12	0.8	12	9.6	11.2	6	80	19
SK0.8-14	0.8	14	11.2	12.8	6	80	19
SK0.8-16	0.8	16	12.8	14.4	6	80	19
SK0.8-18	0.8	18	14.4	16	6	80	19
SK0.8-24	0.8	24	19.2	20.8	6	80	19
SK0.8-30	0.8	30	24	25.6	12	80	19
SK0.8-32	0.8	32	25.6	27.2	12	150	19
SK0.8-36	0.8	36	28.8	30.4	12	150	19
SK0.8-40	0.8	40	32	33.6	12	150	19
SK0.8-45	0.8	45	36	37.6	12	150	19
SK0.8-50	0.8	50	40	41.6	12	150	19
SK0.8-60	0.8	60	48	49.6	12	200	19
SK0.8-64	0.8	64	51.2	52.8	12	200	19
SK0.8-75	0.8	75	60	61.6	16	200	19
SK0.8-80	0.8	80	64	65.6	16	200	19
SK0.8-90	0.8	90	72	73.6	16	200	19
SK1-14	1	14	14	16	6	80	19
SK1-16	1	16	16	18	6	80	19
SK1-20	1	20	20	22	6	80	19
SK1-24	1	24	24	26	12	80	19
SK1-28	1	28	28	30	12	150	19
SK1-30	1	30	30	32	12	150	19
SK1-32	1	32	32	34	12	150	19
SK1-36	1	36	36	38	12	150	19
SK1-40	1	40	40	42	12	200	19
SK1-45	1	45	45	47	12	200	19
SK1-48	1	48	48	50	12	200	19
SK1-50	1	50	50	52	12	200	19
SK1-60	1	60	60	62	16	200	19
SK1-64	1	64	64	66	16	200	19
SK1-72	1	72	72	74	16	200	19

Note: Dimensions (in millimeters unless otherwise indicated) and other engineering data are subject to change. Certified specifications are available on request.